

## Technical Specifications

Technical specification	Units	YD-250RX	YD-400RX	YD-500RX
<b>INPUT</b>				
Input supply:				
Voltage	Volts.	415, +15%, -20%	415, +10%, -20%	415, +10%, -20%
Phase/Freq.	No./Hz	3ph/50-60	3ph/50-60	3ph/50-60
Max. Input KVA@415Vac				
@60% duty cycle	KVA/KW	8/7.7	16.2/15.6	
@100% duty cycle	KVA/KW			23.1/22.2
<b>OUTPUT</b>				
Rated Current Range	Amps	50-250	50-400	60-550
Rated Output Range	Volts	12-26.5	16.5-35.5	17-41.5
Welding Current(40 C)				
@60% duty cycle	Amps	250	400	
@100% duty cycle	Amps	193	310	500
<b>GENERAL</b>				
Power Control method		IGBT Inverter Controlled	IGBT Inverter Controlled	IGBT Inverter Controlled
Digital display		4 Digit- 7 segment LED display	4 Digit- 7 segment LED display	4 digit- 7 segment LED display
Wave form control		Digitally controlled waveform	Digitally controlled waveform	Digitally controlled waveform
Welding sequence		a. Main welding b. Main welding-crater (crater repeat is available) c. Initial - Main welding-crater (crater repeat is available)	a. Main welding b. Main welding-crater (crater repeat is available) c. Initial - Main welding-crater (crater repeat is available)	a. Main welding b. Main welding-crater (crater repeat is available) c. Initial - Main welding-crater (crater repeat is available)
Ingress Protection	Class	IP 21S	IP 23	IP 23
Insulation	Type	H	H	H
Cooling		Forced air cooling	Forced air cooling	Forced air cooling
Power factor	Degree C	> 0.9	> 0.9	> 0.9
Operating temperature		-10 to 50	-10 to 50	-10 to 50
Dimensions(LxBxH)	mm	545x380x570	545x380x570	545x380x635
Weight	Kg	44	52	60
<b>WIRE FEEDER</b>				
Rated Welding Current	Amps	250	400	500
Applicable wire diameter	Mm	0.8, 1.0	0.8, 1.0, 1.2	1.2, 1.6
Cable length	Meter	1.8m (gas hose 4.8 m)	1.8m (gas hose 4.8 m)	1.8m ( gas hose 4.8 m)
Weight	Kg	10	10.5	10.5
Wire feed speed	Meter/minute	5 - 20.1	5.3 - 20.1	5.3 - 20.1
Duty cycle	%	60	60	60
<b>WELDING TORCH</b>				
Rated welding current	Amps	350	400	450
Duty Cycle	10 Min. Cycle	350 Amps, 60% ( CO <sub>2</sub> )	400 Amps, 60% ( CO <sub>2</sub> )	500 Amps, 50%( CO <sub>2</sub> ) 450 Amps, 60% ( CO <sub>2</sub> ) 500 Amps, 25%( CO <sub>2</sub> + Ar ) 450 Amps, 35%( CO <sub>2</sub> + Ar )
		350 Amps, 35% ( CO <sub>2</sub> + Ar )	400 Amps, 30% (CO <sub>2</sub> + Ar)	350 Amps, 100%( CO <sub>2</sub> +Ar ) 270 Amps, 100%( CO <sub>2</sub> + Ar )
Applicable Wire Diameter	Mm	0.8, 1.0, 1.2	0.8, 1.0, 1.2	1.2, 1.6
Cable length	Meter	3	3	3
Weight (Incl. Cable)	Kg	2.8	2.8	3.6
<b>Ordering Information</b>				
	Model No.			
Power Source	-	YD-250RX1DJE	YD-400RX1DJE	YD-500RX1HJF
Wire Feeder	-	YW-25KB3DTE	YW-40KB3DAE	YW-50KB3HRO
Welding Torch	-	YT-35CS4DAF	YT-35CS4DAF	YT-50CS4HAF
Remote ManagementController			TSMYU290	

## Panasonic

Range of Welding Equipment: MMAW | MIG/MAG | TIG | Plasma Cutting | Welding Accessories | Welding Robots  
Panasonic is setting up its own state-of-the-art welding equipment manufacturing facility near Gurgaon, Haryana, India.

For more information please write to [www.panasonic.com/in/welding](http://www.panasonic.com/in/welding)  
For service related queries, write to [welding.service@in.panasonic.com](mailto:welding.service@in.panasonic.com)  
Panasonic India Pvt. Ltd.  
(Division Company: Panasonic Welding Systems India)  
Factory, Head Office and Northern Regional Office  
Village Bid Dadri, Tehsil and District: Jhajjar- 124103, Haryana, India  
Tel.: +91-124-6676372 / 73, Fax: +91-124-6676338  
Email: [welding.north@in.panasonic.com](mailto:welding.north@in.panasonic.com)

Eastern Regional Office: No 1, Vikash Towers, Dr. UN Brahmachari Street, 3rd Floor, Opp. ITC Fortune Hotel, Kolkata 700 016, West Bengal. Phone: +91-33-40269696.  
Email: [welding.east@in.panasonic.com](mailto:welding.east@in.panasonic.com)  
Western Regional Office: Technical Centre, Panasonic Welding Systems India, MCCA-Navalmal Firodia Excellence Centre, J-462, M.I.D.C., Telco Road, Bhosari, Pune 411026, Maharashtra.  
Phone: 09890284448. Email: [welding.west@in.panasonic.com](mailto:welding.west@in.panasonic.com)  
Southern Regional Office: 6th Floor, SPIC Building Annexe, No. 88, Mount Road, Guindy, Chennai 600032, Tamilnadu. Phone: +91-44-61089300. Fax: +91-44-61089399.  
Email: [welding.south@in.panasonic.com](mailto:welding.south@in.panasonic.com)  
Central Regional Office: Ayodhya, 119, 2nd Floor, Bajaj Nagar, Nagpur 440010, Maharashtra. Email: [welding.central@in.panasonic.com](mailto:welding.central@in.panasonic.com)  
Japan Factory: 1-1, 3-chome, Inazu-cho, Toyonaka, Osaka 561 0854, Japan China Factory: No. 9 Qingnan Rd, Tangshan New & Hi-tech Industrial Park, Hebei, China  
Sales Offices at Ahmedabad, Bengaluru, Bhubaneswar, Mumbai and Hyderabad.

[www.panasonic.com/in/welding](http://www.panasonic.com/in/welding)

## Panasonic

# 250/400/500RX

The World's Most Preferred and Reliable  
**Digital+ Inverter IGBT-Controlled  
MIG/MAG Welding Machine**



Remote management system  
for setting and locking  
welding parameters

### World-class welding quality at your doorstep



- Panasonic Welding Systems India has set-up its state-of-the-art manufacturing facility in Jhajjar, Haryana, India. So our globally proven range of welding equipment including MMAW, MIG/MAG, TIG, Plasma Cutting, Welding Accessories, and Welding Robots are now available at your doorstep.
- Assured commitment to long-term product support in terms of Sales, Service and Spares.
- All-India Sales and Service network.

### Key features of 250/400RX

- Inverter-based digital wave control GMAW and FCAW welding outfit.
- Higher efficiency and higher power factor results in greater power saving.
- Designed to work even under high ambient temperatures up to 50°C.
- Lightweight and compact MIG/MAG/FCAW welding outfit.
- Unique design of three layer and four room dust-free structure.
- RX 400 is manufactured as per Std. IEC 60974-1:2000/GB 15579.1:2004.
- Fresh tip treatment and burn-back time control are adjustable.
- Works on 50/60 Hz frequency in power supply.
- Equipped with Synergic Mode (Unitary Function) in which welding voltage is set based on the welding current value automatically. The voltage can be adjusted finely to fit the best current values.
- Digitally controlled waveform enables superior arc characteristics.

### Important safety features

- Over-voltage and under-voltage protection.
- Overheating protection.
- Single-phasing protection.
- Protective 8 Amps fuse for protection of wire feed motor.




[www.panasonic.com/in/welding](http://www.panasonic.com/in/welding)

Panasonic reserves the right to alter the specifications without notice.

## The Digital Inverter advantage

### High quality welding

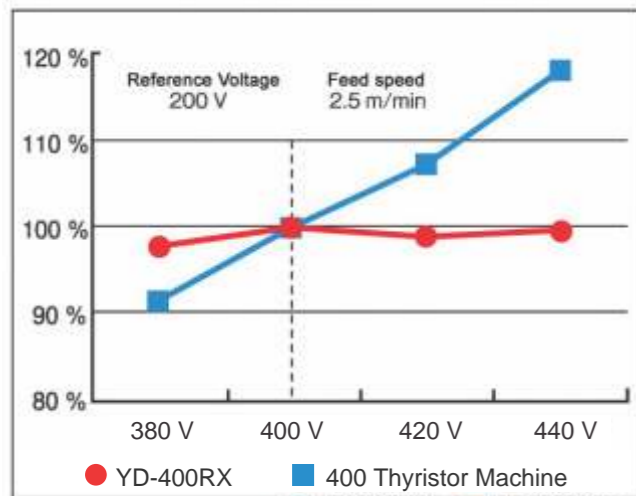


Input voltage and wire consumption

The wire feed remains constant over a wide range of input voltage variations resulting in higher quality of welding.




Welding seam comparison as input voltage varies



Input voltage waveform

The welding seam is more uniform as compared to thyristor-controlled welding even during variation of input voltage.

### Higher energy savings

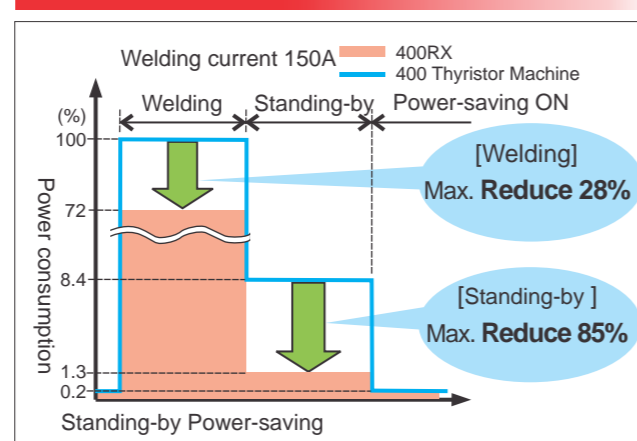

During welding

- More energy saving than conventional machines.
- High-speed CPU ensure more stable wire feed & intensive arc, thus improves the capability of energy saving.

At no-load


- When welding stops, the power supplied to the transformer is cut, so it cost no energy at no load state.
- Energy-saving circuit is activated 7 minutes after the end of welding..

### Ideal for diverse industries

- Automotive
- Shipbuilding & Offshore
- Heavy Construction Equipment
- Railways
- Repair & Maintenance
- General Fabrication
- Civil/Project Construction
- Energy
- Process Industry



## High reliability and easy operation

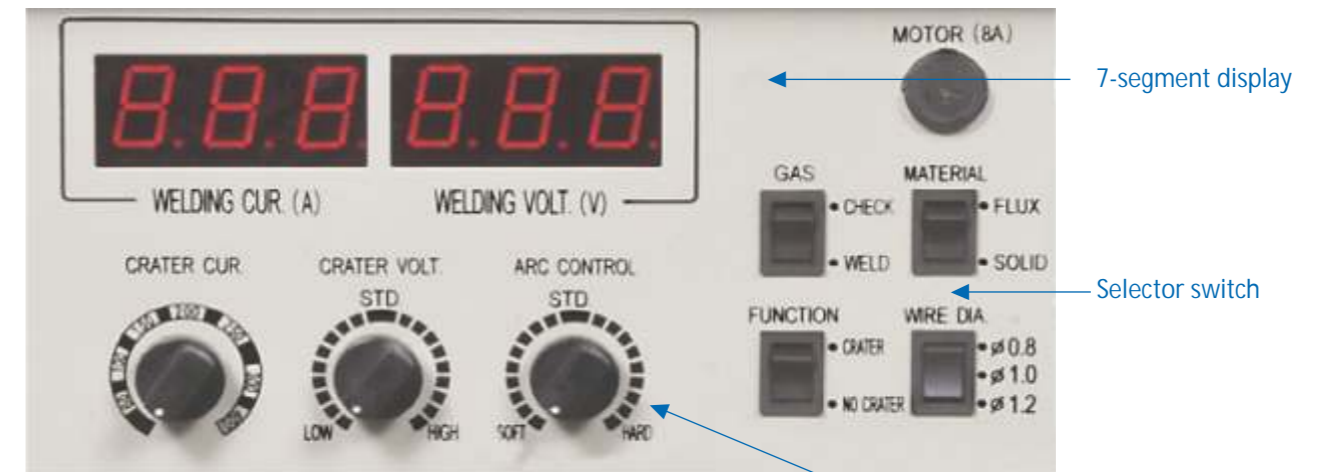

- Designed for high temperature and humidity resistance.
- Can work even under high ambient temperature of 50°C.
- Extremely easy operation.

Indicative panel is of 400RX1 Model

Arc control offers soft setting to reduce spatter and hard setting to ensure more stable arc in high speed welding.

### Other significant features

- Digital display of current and voltage control.
- Equipped with Synergic mode (Unitary function) in which welding voltage is set based on the welding current value automatically. The voltage can be adjusted finely to fit the best current values.
- Low power consumption than conventional machines.
- Power factor > 0.9
- Crater voltage and crater current adjustment through front panel.
- Arc force adjustment for better arc characteristics.
- Digitally controlled waveform enables superior arc characteristics.
- Gas check, wire diameter selection and gas selection switch on the front panel.

### Remote Management Controller (Optional)

With this device these parameters can be set :

- Limit welding current
- Set users' password
- Lock welding parameters
- Display wire feed speed
- Set gas pre-flow and post-flow time
- Set Burnback time
- Penetration depth control
- Recalibrate current and voltage meter



### Wire Feeder and Torch features

- Printed circuit wire feeder motor for better resolution and accuracy.
- Cable-less remote controller mounted on wire feeder as well as lightweight cables enable better mobility.
- Maximum wire feed speed up to 20.1 m/min.
- Standard 2-Roll Drive and optional 4-Roll Drive available.
- Ergonomically designed MIG torches reduces fatigue.
- Lightweight, durable and long lasting.

